



ADUROS SMART ERIA®


USER MANUAL DIMMER




1. Switch off the main power.




2. Ceiling Installation:
Remove the existing lighting:
Detach the existing lighting
and disconnect the wires.
Do not exceed the maximum
load of 300W.




3. Connect the live and neutral wire to [IN] connect the live wire to the right [L] terminal. Connect the neutral wire to the right [N] terminal. Tighten the clamping screws.




4. Connect the 2 wires to "out" 2 wires to the inner [L] and [N] contact. Tighten the clamping screws.

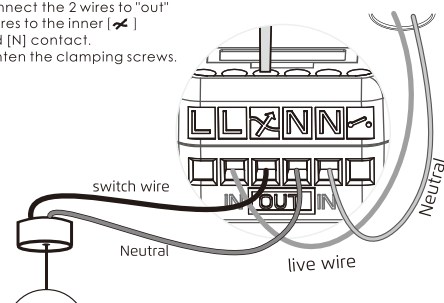


5. Wall installation
Remove the existing wall switch.
This receiver is a replacement for the existing wall switch and it is not suitable if the existing light switch is interconnected to the other light switches for multi way switching.
Do not exceed the maximum load: 300W.



6. Connect the live wire and the switch wire:
Connect the live wire to the [L] contact. Connect the switch wire to the [L] contact. Tighten the clamping screws.

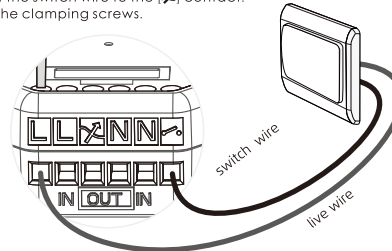


7. If the light is controlled by the live wire and the neutral wire:
Connect the live wire to the left [L] contact. Connect the neutral wire to the left [N] or right [N] connect the switch wire to the [L].

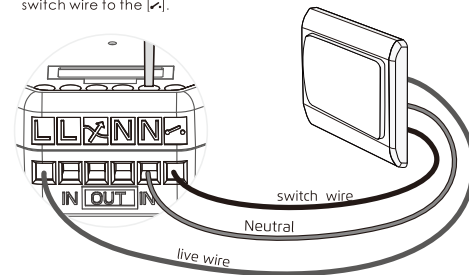


8. Switch on the main power (electric meter box) to continue the installation shock hazard! Do not touch any exposed wiring. Only touch the plastic housing or this product.



9. Add your Dimmer to the AduroSmart ERIA Hub:
Open the AduroSmart ERIA app. Press on "Settings", then "Devices". On the top right corner tap on the "+" symbol. Select "lights". Afterwards, follow the instructions on your screen.

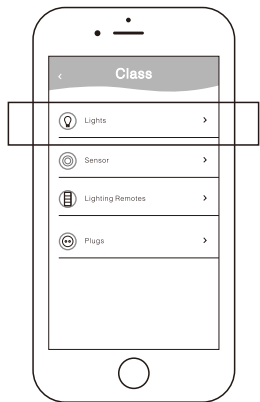


10. Set the device into pairing mode by following below instructions:




To set the device into pairing mode use the pin to press the button for 2 seconds. The device will then go into pairing mode.


11. Press on search in your AduroSmart APP
When the device is successfully paired, the LED indicator will blink green and the device can be seen in the AduroSmart ERIA app.

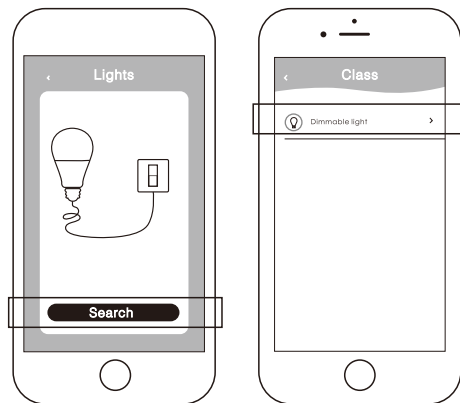

12. To reset to factory default settings use the pin to press the button for 5 seconds.



13. If the dimming effect is not satisfactory press the button for 25 seconds to switch from trailing edge to leading edge. When the switch has been made, the LED indicator will blink once to indicate the dimmer is set to leading edge or twice for trailing edge.



www.adurosmart.com/manuals/dimmer